


Special harmonic steel shims to optimize and customize the rear shocks and front forks setting.

Lamelle in acciaio armonico per ottimizzare e personalizzare le tarature idrauliche di ammortizzatori e forcelle.

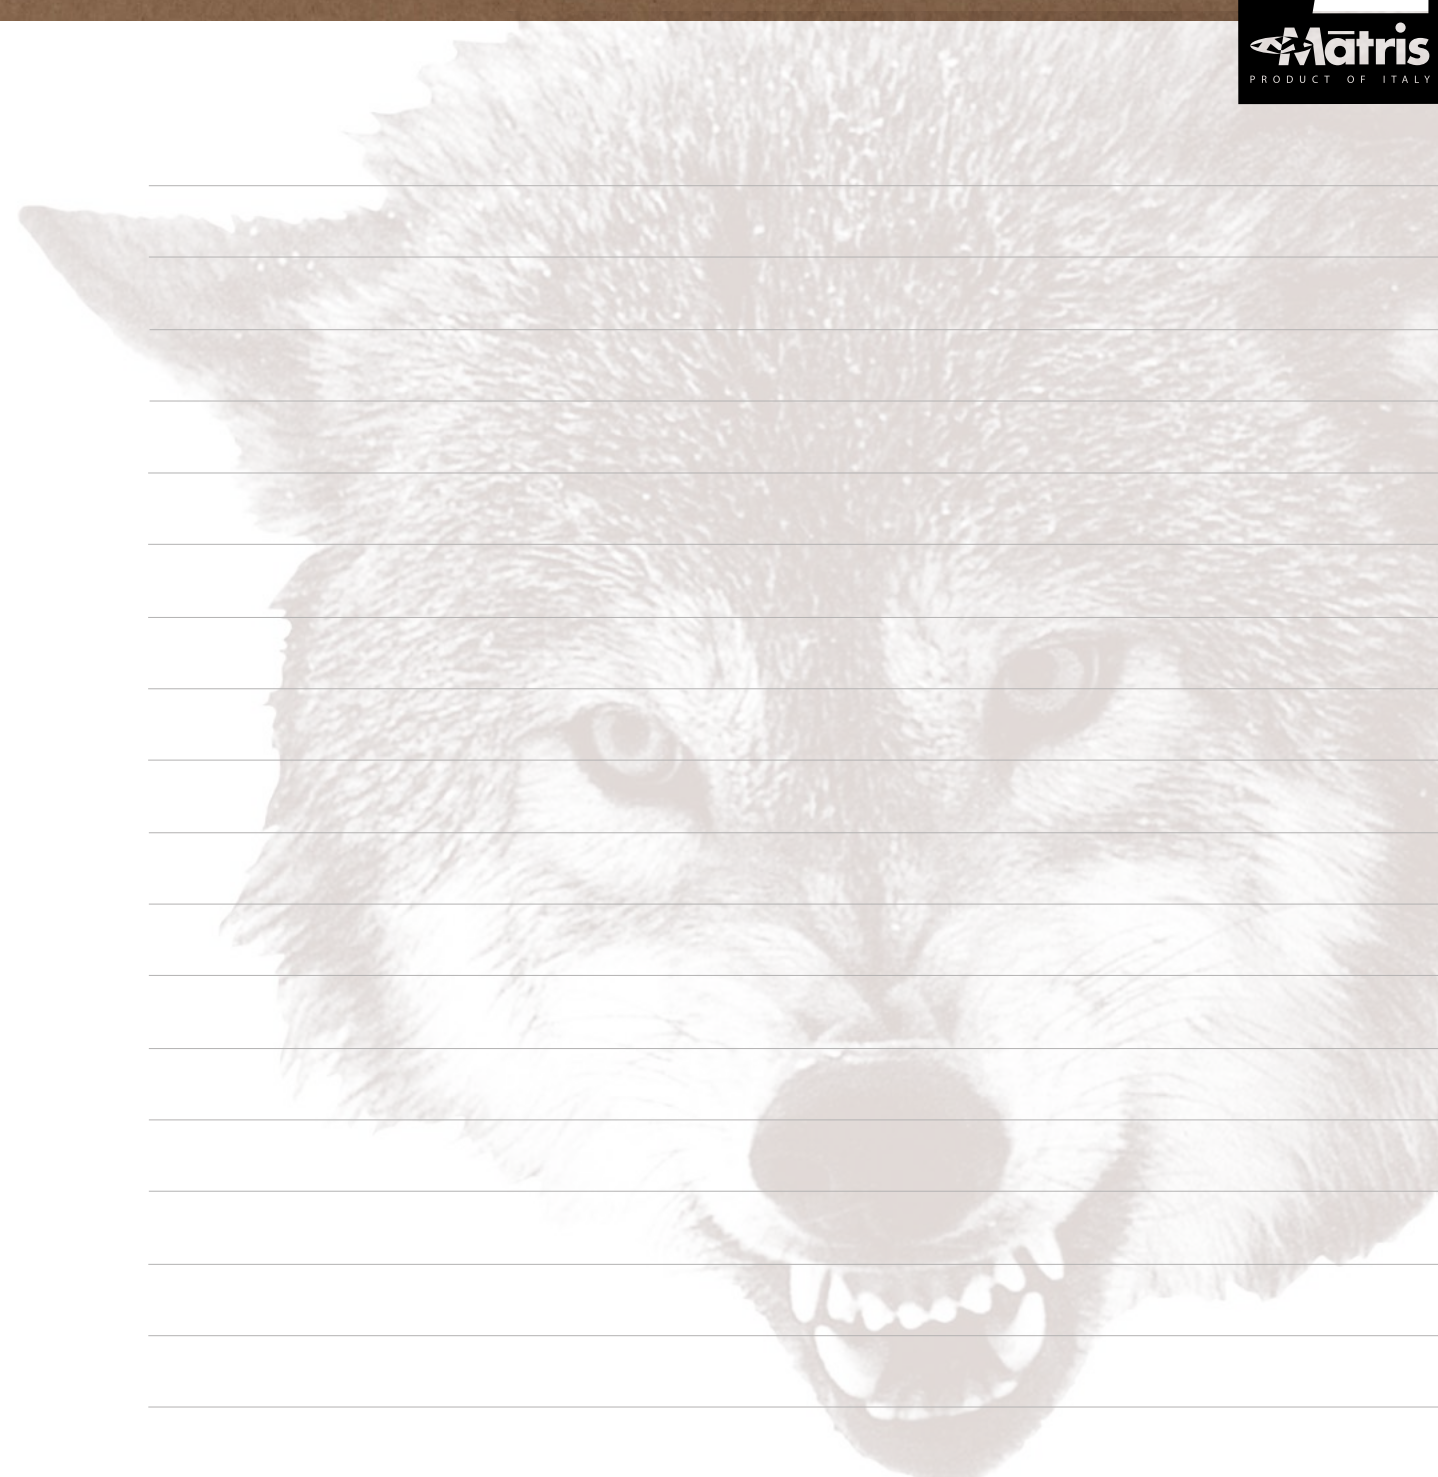

6 mm ID Shims Lamelle Di 6 mm				
OD mm De mm	thickness/spessore			
	0,10	0,15	0,20	0,25
8			•	
8,5			•	
9			•	
9,5			•	
10	•	•	•	•
11	•	•	•	
12	•	•	•	•
13	•	•	•	
14	•	•	•	•
15	•	•	•	
16	•	•	•	•
17	•	•	•	•

8 mm ID Shims Lamelle Di 8 mm			
OD mm De mm	thickness/spessore		
	0,10	0,15	0,20
10	•	•	•
11	•	•	•
12	•	•	•
13	•	•	•
14	•	•	•
15	•	•	•
16	•	•	•
16	•	•	•
18	•	•	•
19	•	•	•
20	•	•	•
21	•	•	•
22	•	•	•
23	•	•	•
24	•	•	•
25	•	•	•
26	•	•	•
27	•	•	•
28	•	•	•
29	•	•	•

12 mm ID Shims Lamelle Di 12 mm					
OD mm De mm	thickness/spessore				
	0,10	0,15	0,20	0,25	0,30
16	•	•	•	•	•
18	•	•	•	•	•
20	•	•	•	•	•
22	•	•	•	•	•
24	•	•	•	•	•
26	•	•	•	•	•
28	•	•	•	•	•
30	•	•	•	•	•
32	•	•	•	•	•
34	•	•	•	•	•
36	•	•	•	•	•
38	•	•	•	•	•
40	•	•	•	•	•

Valve shims order code example
LF612015

Shim: DI 6 mm
OD 12 mm
Thickness 0.15 mm

Minimum order: 10 pcs each size